
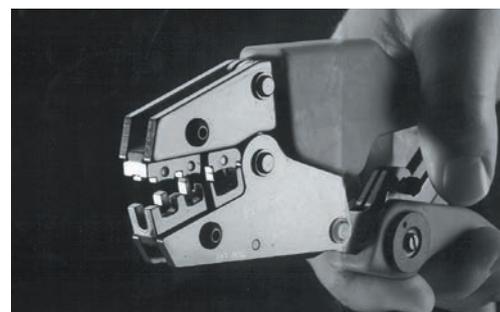



特長

- 圧着端子、D-subコネクタ専用。
- ギザギザ型、対称型の正確かつ迅速な圧着。
- 精密、長寿命なスウェーデン鋼の焼入れ仕上げ。
- 内蔵の精巧なラチェット機構により圧着作業の終了が確認され、電気的および機械的に安全な接続が保証されます。



コネクタ例	型番	ダイス	クリンプツール	断面積 (mm ²)	AWG	クリンプ形状
	50-0110		 フレームタイプD	0.14~1.0	26-16	
	50-0725		 フレームタイプD	0.75~2.5	22-14	
	50-0760		 フレームタイプC	0.75~6.0	22-10	
	50-0325		 フレームタイプD	0.35~2.5	22-14	
	50-0360		 フレームタイプD	0.35~6.0	22-10	
	50-4099		 フレームタイプC	4.0~10.0	12- 8	
	52-0505L (ロケータ付)		 フレームタイプD	0.05~0.5	30-20	
	50-0115		 フレームタイプD	0.1~1.5	26-16	
	59-0560		 フレームタイプD	0.5~6.0	20-10	
	50-0560		 フレームタイプC	0.5~6.0	22-10	